



# Network Management & Monitoring

## Network and Server Statistics Using Cacti



These materials are licensed under the Creative Commons *Attribution-Noncommercial 3.0 Unported* license  
(<http://creativecommons.org/licenses/by-nc/3.0/>)

# Introduction

## Network Monitoring Tools

- Availability
- Reliability
- Performance

*Cacti monitors the **performance** and usage of devices.*


# Introduction

- A tool to monitor, store and present network and system/server statistics
- Designed around RRDTool with a special emphasis on the graphical interface
- Almost all of Cacti's functionality can be configured via the Web.
- You can find Cacti here:  
<http://www.cacti.net/>



# Introduction

**Cacti:** Uses RRDtool, PHP and stores data in MySQL. It supports the use of SNMP and graphics with MRTG.

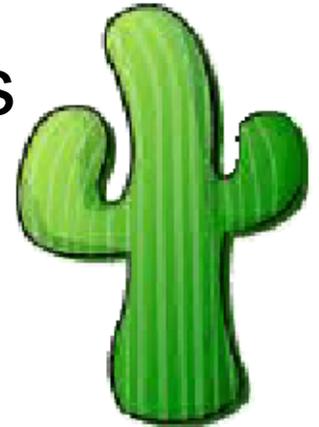

*“Cacti is a complete frontend to RRDTool, it stores all of the necessary information to create graphs and populate them with data in a MySQL database. The frontend is completely PHP driven. Along with being able to maintain Graphs, Data Sources, and Round Robin Archives in a database, cacti handles the data gathering. There is also SNMP support for those used to creating traffic graphs with MRTG.”*

# General Description

1. Cacti is written as a group of PHP scripts.
2. The key script is “poller.php”, which runs every 5 minutes (by default). It resides in /usr/share/cacti/site.
3. To work poller.php needs to be in /etc/cron.d/cacti like this:

```
MAILTO=root
```

```
*/5 * * * * www-data php /usr/share/cacti/site/poller.php >/dev/null 2>/var/log/cacti/poller-error.log
```

4. Cacti uses RRDtool to create graphs for each device and data that is collected about that device. You can adjust all of this from within the Cacti web interface.
5. The RRD files are located in /var/lib/cacti/rra when cacti is installed from packages.

# Advantages

**You can measure Availability, Load, Errors and more all with history.**

- Cacti can view your router and switch interfaces and their traffic, including all error traffic as well.
- Cacti can measure drive capacity, CPU load (network h/w and servers) and much more. It can react to conditions and send notifications based on specified ranges.

## **Graphics**

- Allows you to use all the functionality of rrdgraph to define graphics and automate how they are displayed.
- Allows you to organize information in hierarchical tree structures.

## **Data Sources**

- Permits you to utilize all the functions of rrdcreate and rrdupdate including defining several sources of information for each RRD file.

# Advantages cont.

## Data Collection

- Supports SNMP including the use of *php-snmp* or *net-snmp*
- Data sources can be updated via SNMP or by defining scripts to capture required data.
- An optional component, *cactid*, implements SNMP routines in C with multi-threading. Critical for very large installations.

## Templates

- You can create templates to reuse graphics definitions, data and device sources

## Cacti Plugin Architecture

- Extends Cacti functionality. Many, many plugins are available.

## User Management

- You can manage users locally or via LDAP and you can assign granular levels of authorization by user or groups of users.

# Disadvantages

- **Configuration of Interfaces is Tedious**
- **Configuration of Plugin Architecture is non-trivial**
- **Upgrading versions can be complex**

## **Advice:**

For continuous use or large installations it is likely that you will be using scripts and tools to automate the configuration of Cacti.

# Steps to add and monitor devices


Before we install Cacti we demonstrate how to use the interface to add and monitor some devices...

# Adding a Device

## Management -> Devices -> Add

Specify device attributes

- We'll add an entry for our gateway router, [gw.ws.nsrc.org](http://gw.ws.nsrc.org)\*

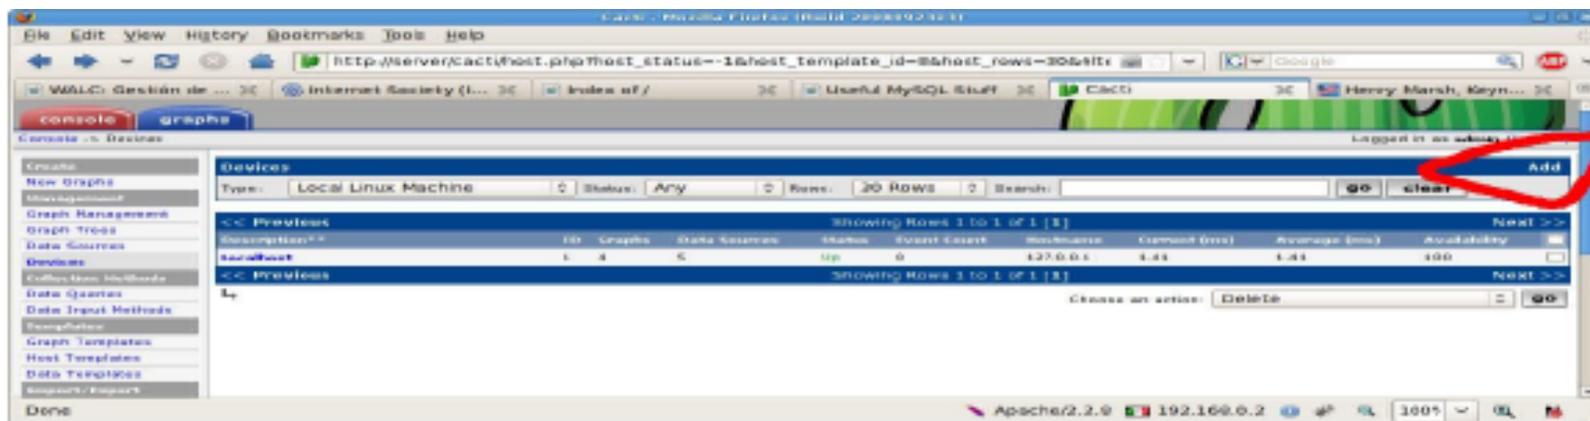

\*Actual device name may be different.

# Add Devices: 2

**Devices [edit: Gateway Router]**

**General Host Options**

**Description**  
Give this host a meaningful description.

**Hostname**  
Fully qualified hostname or IP address for this device.

**Host Template**  
Choose what type of host, host template this is. The host template will govern what kinds of data should be gathered from this type of host.

**Disable Host**  
Check this box to disable all checks for this host.  Disable Host

**Availability/Reachability Options**

**Downed Device Detection**  
The method Cacti will use to determine if a host is available for polling.  
*NOTE: It is recommended that, at a minimum, SNMP always be selected.*

**Ping Method**  
The type of ping packet to send.  
*NOTE: ICMP on Linux/UNIX requires root privileges.*

**Ping Port**  
TCP or UDP port to attempt connection.

**Ping Timeout Value**  
The timeout value to use for host ICMP and UDP pinging. This host SNMP timeout value applies for SNMP pings.

**Ping Retry Count**  
After an initial failure, the number of ping retries Cacti will attempt before falling.

**SNMP Options**

**SNMP Version**  
Choose the SNMP version for this device.

**SNMP Community**  
SNMP read community for this device.

**SNMP Port**  
Enter the UDP port number to use for SNMP (default is 161).

**SNMP Timeout**  
The maximum number of milliseconds Cacti will wait for an SNMP response (does not work with php-snmp support).

**Maximum OID's Per Get Request**  
Specified the number of OID's that can be obtained in a single SNMP Get request.

**Additional Options**

**Notes**  
Enter notes to this host.

**Menu changes after you select SNMP version below!**

# Add Devices: 3

- Choose SNMP version 2 for this workshop.
- For “Downed Device Detection” we recommend either using *Ping and SNMP*, or just *Ping*.
- Use “NetManage” for the “SNMP Community” string.

SNMP access is a security issue:

- Version 2 is not encrypted
- Watch out for globally readable “public” communities
- Be careful about who can access r/w communities.
- Replace “xxxxxxx” with your local public r/o string

# Add Devices: 4

For a router you may see *a lot* of potential network interfaces that are detected by SNMP.

Associated Data Queries			
Data Query Name	Debugging	Re-Index Method	Status
1) Karlnet - Wireless Bridge Statistics	(Verbose Query)	Uptime Goes Backwards	Success [0 Items, 0 Rows]
2) SNMP - Interface Statistics	(Verbose Query)	Uptime Goes Backwards	Success [59 Items, 7 Rows]

Add Data Query:  Re-Index Method:

Your decision is to create graphs for all of these are not. Generally the answer is, “Yes” – Why?

# Create Graphics

- Chose the “Create graphs for this host”
- Under Graph Templates generally check the top box that chooses *all* the available graphs to be displayed.
- Press Create.
- You can change the default colors, but the predefined definitions generally work well.

# Create Graphics: 2

Save Successful.

## Gateway Router (gw.ws.nsrc.org)

### SNMP Information

System: Cisco IOS Software, 1841 Software (C1841-ADVIPSERVICESK9-M), Version  
www.cisco.com/techsupport Copyright (c) 1986-2006 by Cisco Systems,  
Inc. Compiled Tue 28-Feb-06 21:03 by alnguyen  
Uptime: 24881862 (2 days, 21 hours, 6 minutes)  
Hostname: sanog17-2.learn.ac.lk  
Location:  
Contact:

- \* Create Graphs for this Host
- \* Data Source List
- \* Graph List

### Ping Results

UDP Ping Success (1.19 ms)

## Devices [edit: Gateway Router]

### General Host Options

#### Description

Give this host a meaningful description.

#### Hostname

Fully qualified hostname or IP address for this device.

#### Host Template

Choose what type of host, host template this is. The host template will govern what kinds of data should be gathered from this type of host.

# Create Graphics: 3

## Gateway Router (gw.ws.nsrc.org) Cisco Router

Host: Gateway Router (gw.ws.nsrc.org) Graph Types: All

[\\*Edit this Host](#)  
[\\*Create New Host](#)

### Graph Templates

Graph Template Name

Create: Cisco - CPU Usage

Create: (Select a graph type to create)

### Data Query [SNMP - Interface Statistics]

Index	Status	Description	Name (IF-MIB)	Alias (IF-MIB)	Type	Speed	Hardware Address	IP Address	<input checked="" type="checkbox"/>
1	Up	FastEthernet0/0	Fa0/0		ethernetCsmacd(6)	100000000	00:24:97:5C:C0:D2	10.10.0.254	<input checked="" type="checkbox"/>
2	Up	FastEthernet0/1	Fa0/1	connection to LEARN VPLS	ethernetCsmacd(6)	100000000	00:24:97:5C:C0:D3	192.248.5.1	<input checked="" type="checkbox"/>
3	Up	Null0	Nu0		other(1)	4294967295			<input checked="" type="checkbox"/>
4	Up	Tunnel0	Tu0		tunnel(131)	9000			<input checked="" type="checkbox"/>
5	Up	Tunnel1	Tu1		tunnel(131)	9000			<input checked="" type="checkbox"/>
6	Up	FastEthernet0/0.254	Fa0/0.254		l2vlan(135)	100000000	00:24:97:5C:C0:D2	10.10.254.254	<input checked="" type="checkbox"/>



Select a graph type: In/Out Bits

cancel

create

# Create Graphics: 4

The screenshot shows a web-based console interface for creating graphs. The top navigation bar has 'console' and 'graphs' tabs. Below the navigation, the breadcrumb path is 'Console -> Create New Graphs -> Create Graphs from Data Query'. The user is logged in as 'admin'. The left sidebar contains a menu with categories: 'Create', 'Management', 'Data Sources', 'Devices', 'Collection Methods', 'Data Queries', 'Data Input Methods', 'Templates', 'Import/Export', 'Configurations', 'Settings', 'Utilities', and 'System Utilities'. The main content area is divided into three sections, each with a blue header and a white body. The first section is 'Create Graph from "Linux - Memory Usage"', the second is 'Create Graph from "Unix - Load Average"', and the third is 'Create Graph from "Unix - Logged in Users"'. Each section has a 'Legend Color' field with a color picker. The third section also has a 'Graph Items' field. At the bottom right, there are 'cancel' and 'create' buttons. A small green cactus icon is visible in the bottom left corner of the sidebar.


You'll see this screen later when you are creating graphics for hosts vs. routers

# View the Graphics

- Place the new device in its proper location in your tree hierarchy.
- Building your display hierarchy is your decision. It might make sense to try drawing this out on paper first.
  - Under Management → Graph Trees select the Default Tree hierarchy (or, create one of your own).


# Graphics Tree

First, press “Add” if you want a new graphing tree:

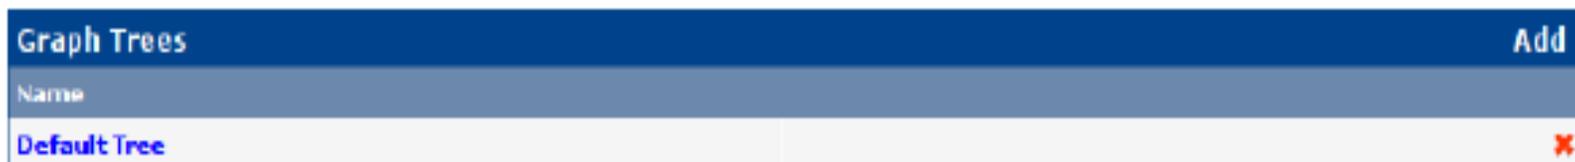

The screenshot shows a dialog box titled "Graph Trees" with a blue header bar. On the right side of the header bar is an "Add" button. Below the header is a list with a "Name" column. The first item in the list is "Default Tree" in blue text, and there is a red "X" icon to its right.

Second, name your tree, choose the sorting order (the author likes Natural Sorting and press “create”):

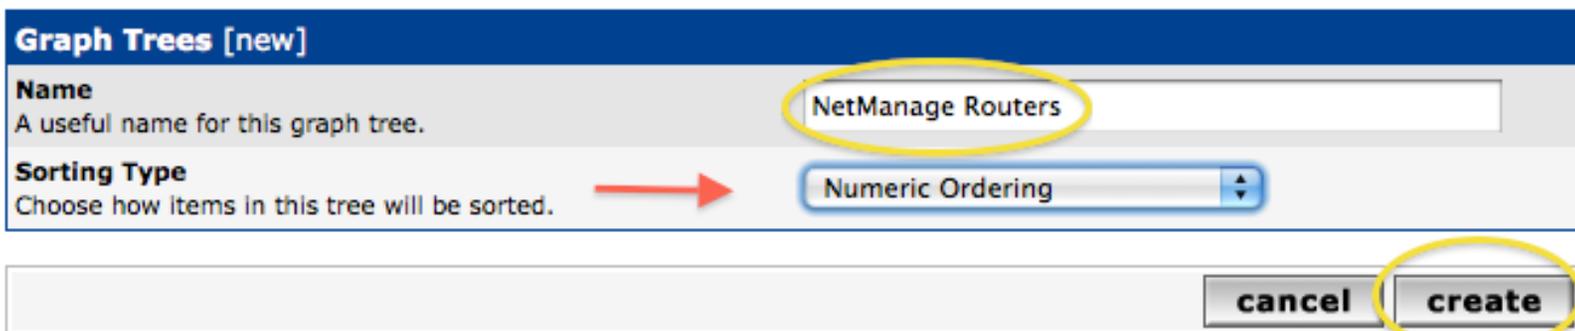

The screenshot shows a dialog box titled "Graph Trees [new]" with a blue header bar. It contains two input fields: "Name" with the value "NetManage Routers" and "Sorting Type" with the value "Numeric Ordering". A red arrow points to the "Sorting Type" dropdown. At the bottom right are "cancel" and "create" buttons. The "Name" field, "Numeric Ordering" dropdown, and "create" button are circled in yellow.

# Graphics Tree

Third, add devices to your new tree:

**Save Successful.**

**Graph Trees [edit: NetManage Routers]**

**Name**  
A useful name for this graph tree.

**Sorting Type**  
Choose how Items in this tree will be sorted.

**Tree Items** **Add**

++ --

Item	Value
No Graph Tree Items	

Once you click “Add” you can add “Headers” (separators), graphs or hosts. Now we'll add Hosts to our newly created graph tree:

**Tree Items**

**Parent Item**  
Choose the parent for this header/graph.


**Tree Item Type**  
Choose what type of tree item this is.

**Tree Item Value**

**Host**  
Choose a host here to add it to the tree.

**Graph Grouping Style**  
Choose how graphs are grouped when drawn for this particular host on the tree.

# Graphics Tree with 2 Devices

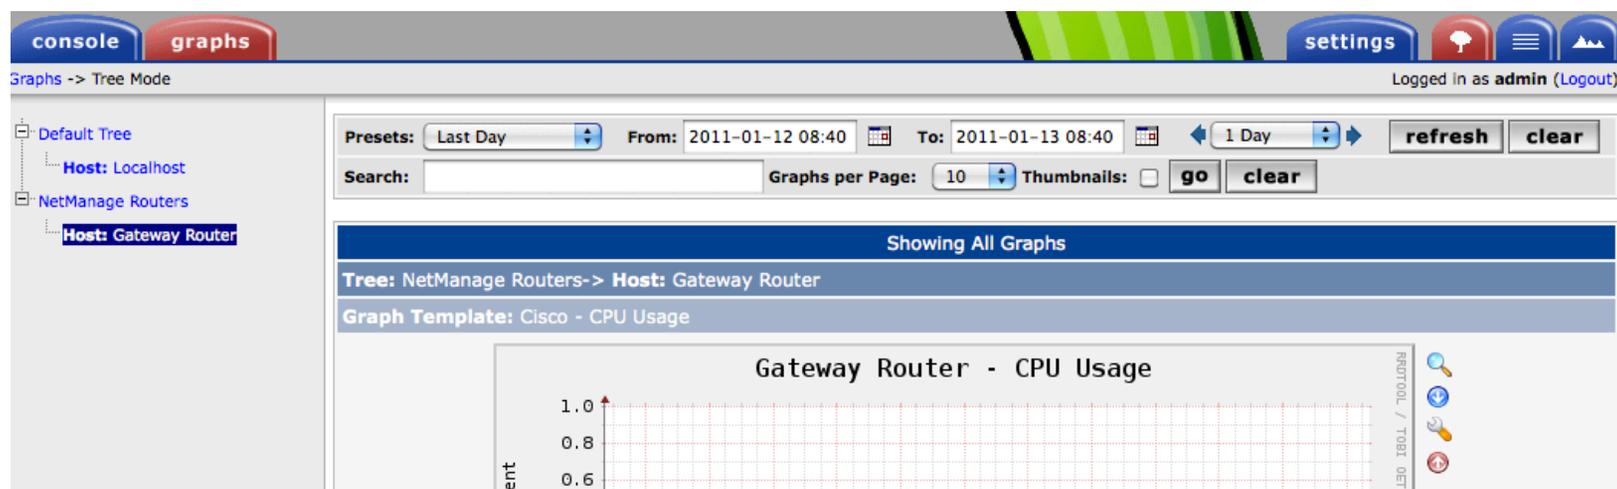

- Our graphics tree *just* after the first two devices were added.
- So far, no graphics are displayed – the first graphics can take up to 5 minutes to display.
- Cacti graphs are stored on disk and updated using RRDTool via the poller.php script, which, by default, is run every five minutes using `cron`.



# Initial Graphs

Presets: Last Day From: 2010-07-21 02:55 To: 2010-07-22 02:55 1 Day refresh clear  
Search: Graphs per Page: 10 Thumbnails: go clear

Showing All Graphs

Tree: AROC Routers-> Host: Gateway Router Group 1

Graph Template: Interface - Traffic (bits/sec)

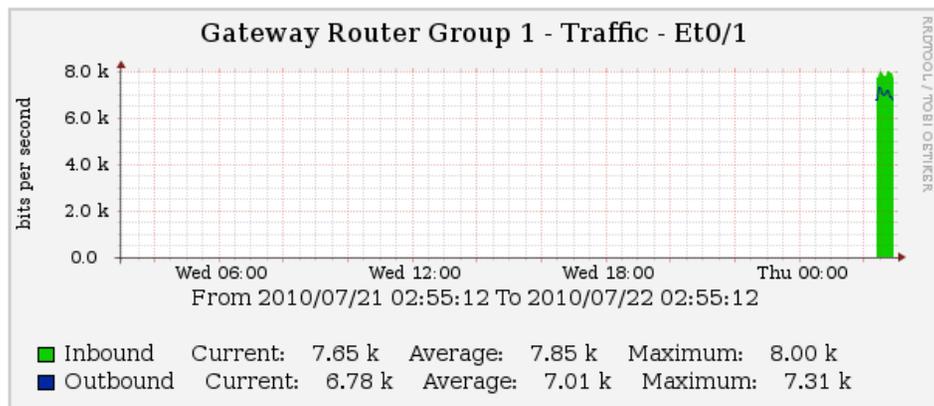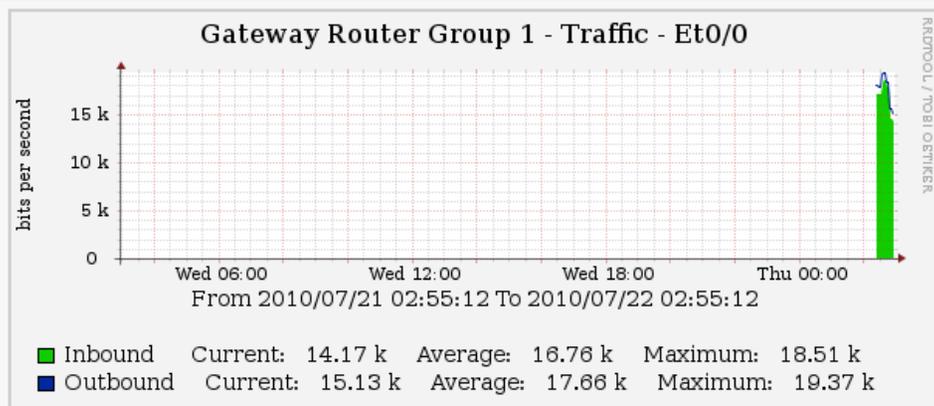



# Next Steps

- You can extend cacti by installing the Cacti Plugin Architecture:  
<http://cactiusers.org/wiki/PluginArchitectureInstall>
- There are a number of popular Cacti plugins, such as:
  - Settings
  - thold
  - PHP Weathermap
- A good place to start is <http://cactiusers.net/> and Google.
- To send email to RT from Cacti via rt-mailgate you can use the Cacti “settings” plugin:  
<http://docs.cacti.net/plugin:settings>

# Conclusions

- Cacti is very flexible due to its use of templates.
- Once you understand the concepts behind RRDTool, then how Cacti works should be (more or less) intuitive.
- The visualization hierarchy of devices helps to organize and discover new devices quickly.
- It is not easy to do a rediscover of devices.
- To add lots of devices requires lots of time and effort. Software such as Netdot, Netdisco, IPPlan, TIPP can help – as well as local scripts that update the Cacti back-end MySQL database directly.

# References

- Cacti Web Site:  
<http://www.cacti.net/>
- Cacti Discussion Group:  
<http://forums.cacti.net/>
- Cacti Users – Plugin Architecture Home  
<http://cactiusers.org/>
- Instructions to Install Cacti from Source and configure the thold and settings plugins are available on the class wiki

# Cacti Demonstration

Before we install Cacti we are going to do a live demonstration of how to use the Cacti interface to add and monitor a few devices.



# **Cacti Installation and Configuration**

# Exercises

## Your Mission...

- Install Cacti
- Create device entry for your local router
- Create device entries for your local servers
- Create graphs for each item
- Place PCs, Routers, Switches in a tree hierarchy of your design.

## If you have time...

- Create device entries for any additional network equipment in the classroom. Use SNMP for all items.

Use the Network Diagram on the class wiki as a reference.


# Installation: Ubuntu Server 10.04

- Available in RPM form and packages for Gentoo, Red Hat, Fedora, SuSE, FreeBSD, etc.
- It is necessary to install *cactid* separately if you wish to use this for larger installations. This is the *cacti-spine* package in Ubuntu.
- In Ubuntu/Debian... (we'd do this on our local machines:)

```
# apt-get install cacti
```


# Installation: 2

We may have already done this for you. If so, you can use these slides for informational purposes. Skip to the *Cacti Web* installation steps to continue...

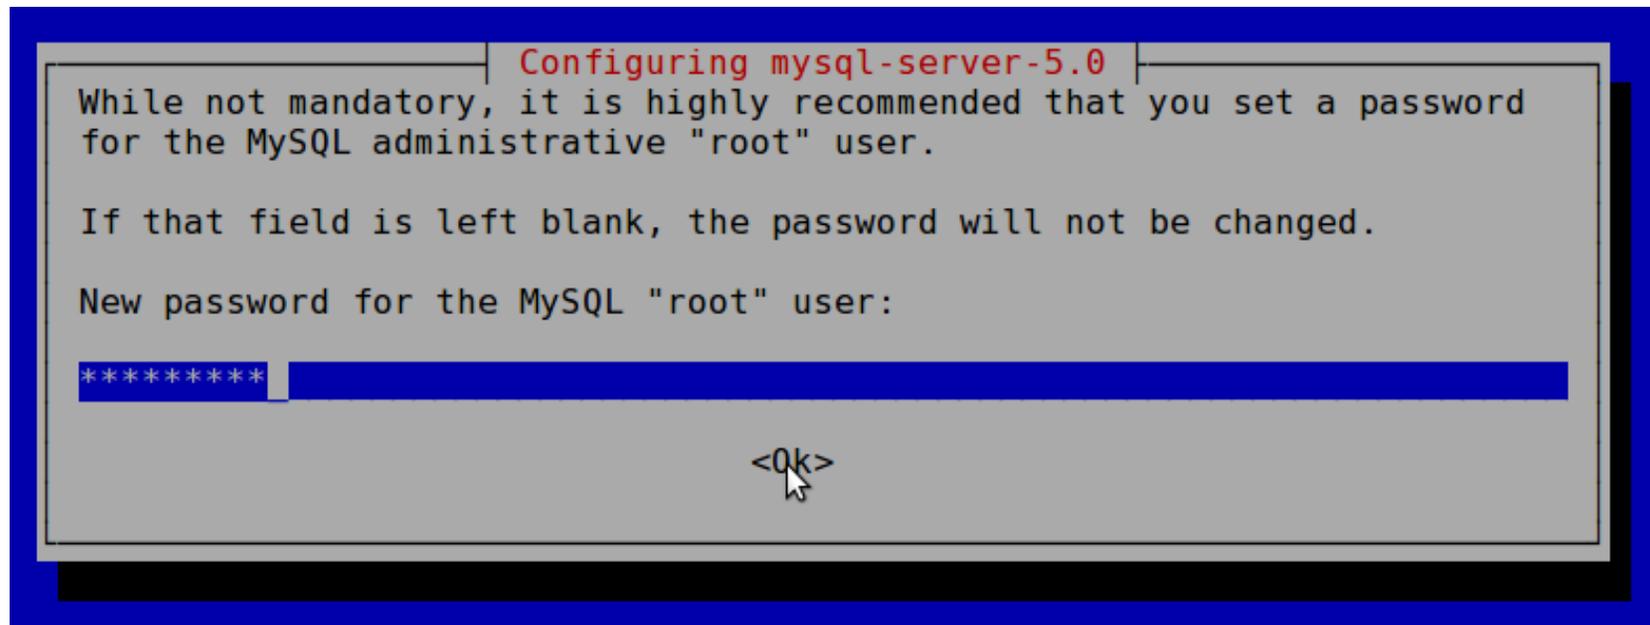


***Use the workshop password for your sysadm user***

# Installation: 3

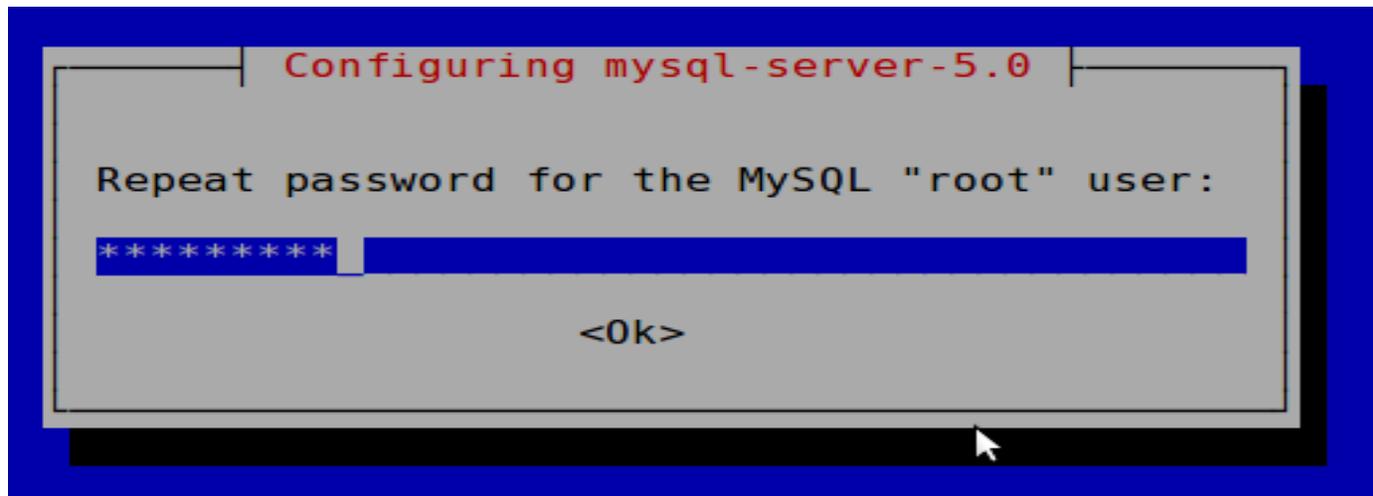

Again, use the workshop password


# Installation: 4

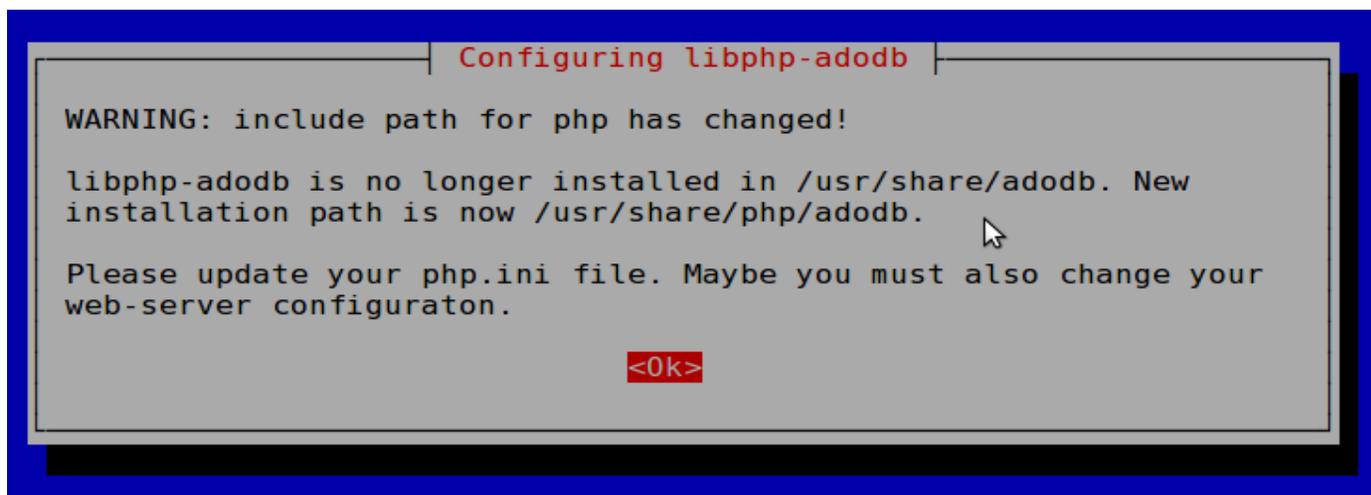

```
Configuring libphp-adodb  
WARNING: include path for php has changed!  
  
libphp-adodb is no longer installed in /usr/share/adodb. New  
installation path is now /usr/share/php/adodb.  
  
Please update your php.ini file. Maybe you must also change your  
web-server configuraton.  
  
<Ok>
```

Informational message. Is not normally an issue.

# Installation: 5

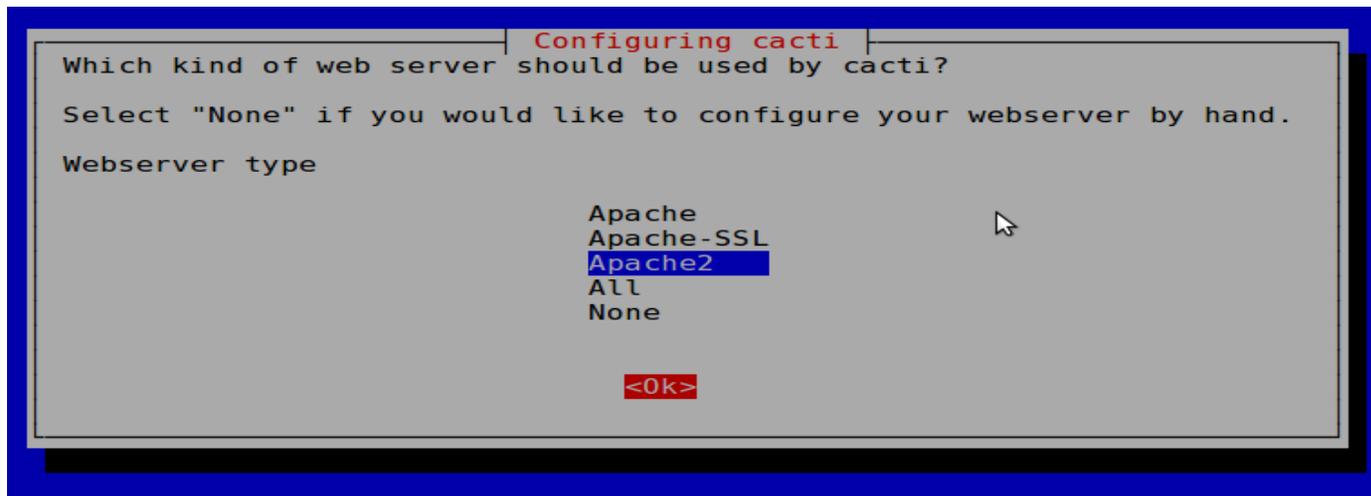

**We are using Apache2. Be sure this is chosen**  
then highlight <Ok> and press <ENTER> to continue.

# Installation: 6

```
Configuring cacti


cacti must have a database installed and configured before it can be
used.  If you like, this can be handled with dbconfig-common.

If you are an advanced database administrator and know that you want to
perform this configuration manually, or if your database has already
been installed and configured, you should refuse this option.  Details
on what needs to be done should most likely be provided in
/usr/share/doc/cacti.

Otherwise, you should probably choose this option.
Configure database for cacti with dbconfig-common?
<Yes> <No>
```

Choose <Yes>


# Installation: 7

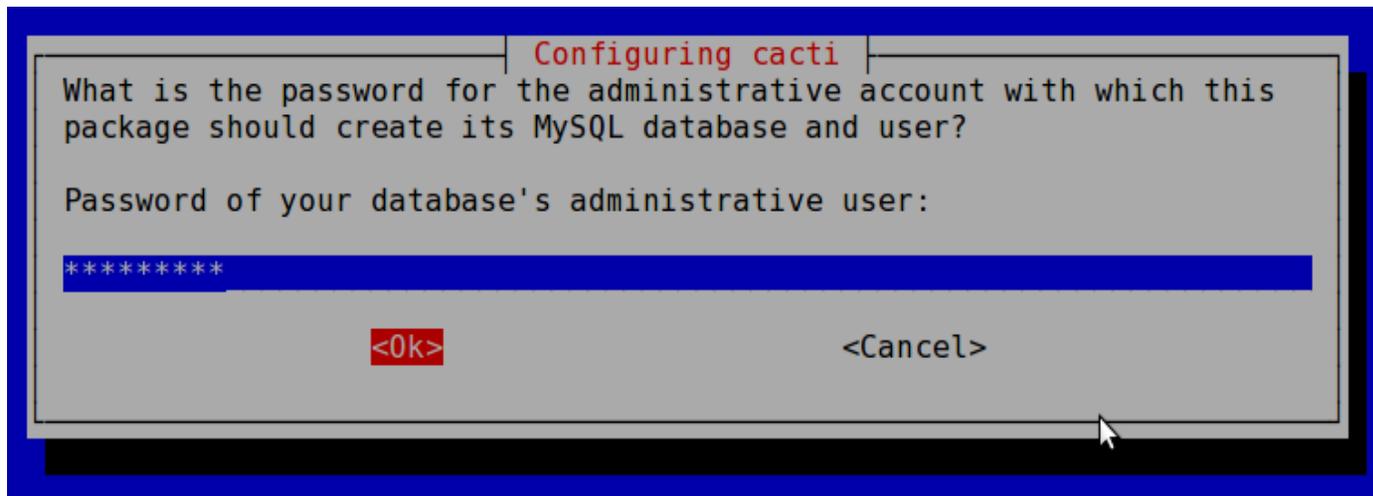

Use our workshop password.


**Do no use a different password. You can break later exercises.**

# Installation: 8

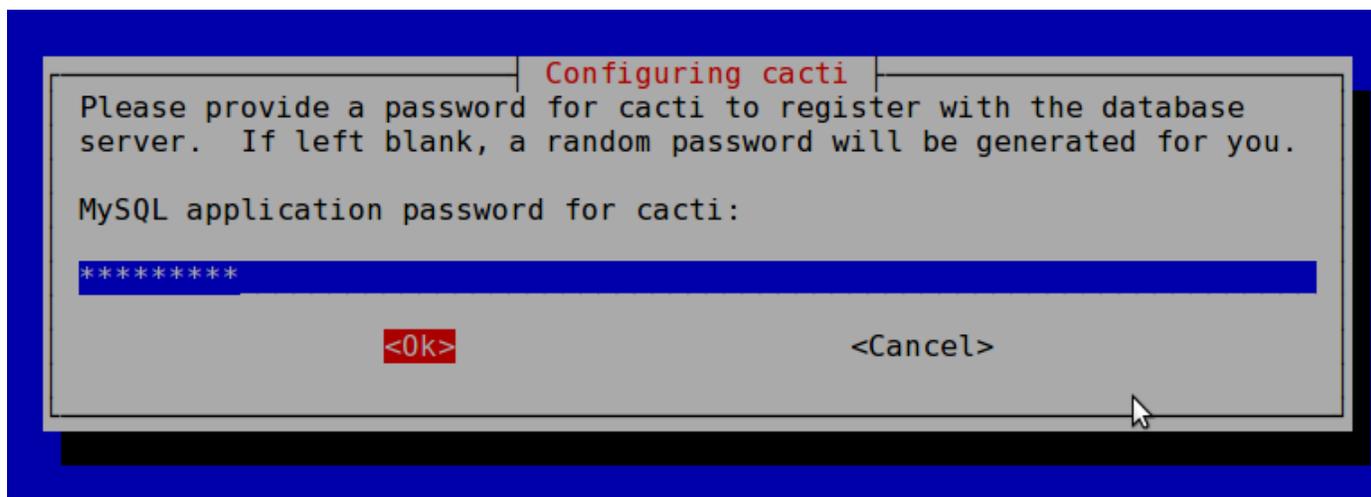

Again, use the workshop password.

# Installation: 9

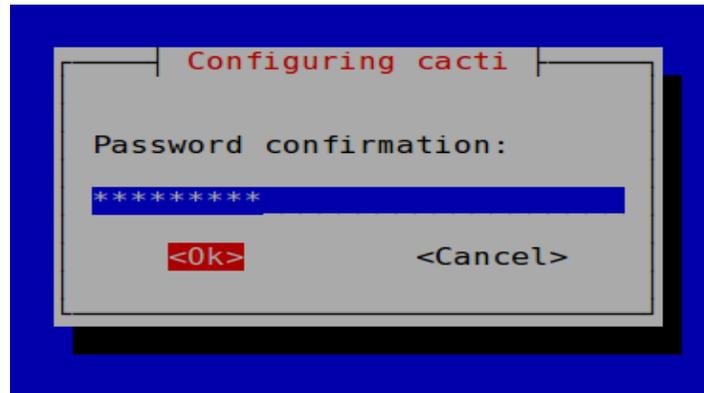

Finally, one last time, use the workshop password.

# Cacti: Installation - Web

**Now use a web browser and open the following address:**

<http://pcN.ws.nsrc.org/cacti>

**You will see the following...**

# Cacti: Installation - Web

## Cacti Installation Guide

Thanks for taking the time to download and install cacti, the complete graphing solution for your network. Before you can start making cool graphs, there are a few pieces of data that cacti needs to know.

Make sure you have read and followed the required steps needed to install cacti before continuing. Install information can be found for [Unix](#) and [Win32](#)-based operating systems.

Also, if this is an upgrade, be sure to reading the [Upgrade](#) information file.

Cacti is licensed under the GNU General Public License, you must agree to its provisions before continuing:

```
This program is free software; you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation; either version 2 of the License, or (at
your option) any later version.
```

```
This program is distributed in the hope that it will be useful, but
WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
General Public License for more details.
```

Next >>

Press “Next >>”

# Cacti: Installation - Web

**Cacti Installation Guide**

Please select the type of installation

The following information has been determined from Cacti's configuration file. If it is not correct, please edit 'include/config.php' before continuing.

Database User: cacti  
Database Hostname:  
Database: cacti  
Server Operating System Type: unix

[Next >>](#)

Choose "New Install" and press "Next >>" again.

# Cacti: Installation - Web

## Cacti Installation Guide

Make sure all of these values are correct before continuing.

**[FOUND] RRDTool Binary Path:** The path to the rrdtool binary.

/usr/bin/rrdtool

[OK: FILE FOUND]

**[FOUND] PHP Binary Path:** The path to your PHP binary file (may require a php recompile to get this file).

/usr/bin/php

[OK: FILE FOUND]

**[FOUND] snmpwalk Binary Path:** The path to your snmpwalk binary.

/usr/bin/snmpwalk

[OK: FILE FOUND]

**[FOUND] snmpget Binary Path:** The path to your snmpget binary.

/usr/bin/snmpget

[OK: FILE FOUND]

**[FOUND] snmpbulkwalk Binary Path:** The path to your snmpbulkwalk binary.

/usr/bin/snmpbulkwalk

[OK: FILE FOUND]

**[FOUND] snmpgetnext Binary Path:** The path to your snmpgetnext binary.

/usr/bin/snmpgetnext

[OK: FILE FOUND]

**[FOUND] Cacti Log File Path:** The path to your Cacti log file.

/var/log/cacti/cacti.log

[OK: FILE FOUND]

**SNMP Utility Version:** The type of SNMP you have installed. Required if you are using SNMP v2c or don't have embedded SNMP support in PHP.

NET-SNMP 5.x

**RRDTool Utility Version:** The version of RRDTool that you have installed.

RRDTool 1.3.x

**NOTE:** Once you click "Finish", all of your settings will be saved and your database will be upgraded if this is an upgrade. You can change any of the settings on this screen at a later time by going to "Cacti Settings" from within Cacti.

Finish


Your screen should look like this. If it does not ask your instructor for help.

Press "Finish"

## Note!

Be sure that "RRDTool 1.3.x" (or higher) is chosen and *not* "1.0.x".

# Cacti: First Time Login

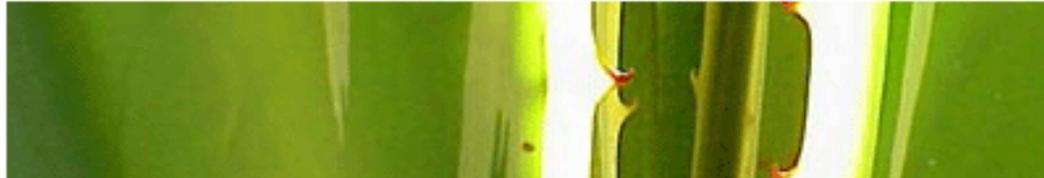

## User Login

Please enter your Cacti user name and password below:

User Name:

Password:


Login

First time login use:

User Name: *admin*

Password: *admin*

# Cacti: Change Default Password

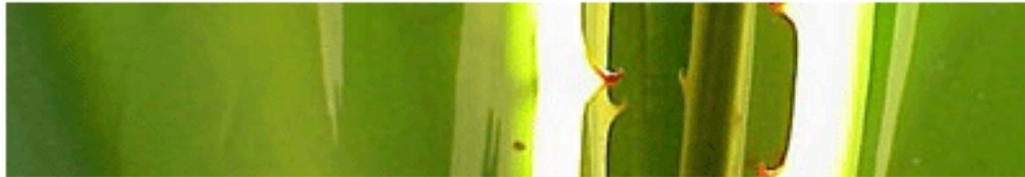

## User Login

**\*\*\* Forced Password Change \*\*\***

Please enter a new password for cacti:

Password:

Confirm:

Save

Now you must change the *admin* password. Please use the workshop password.